



## 48 SERIES **UL - 711** "ULTRA" BRAND TRANSFER BLOCKS

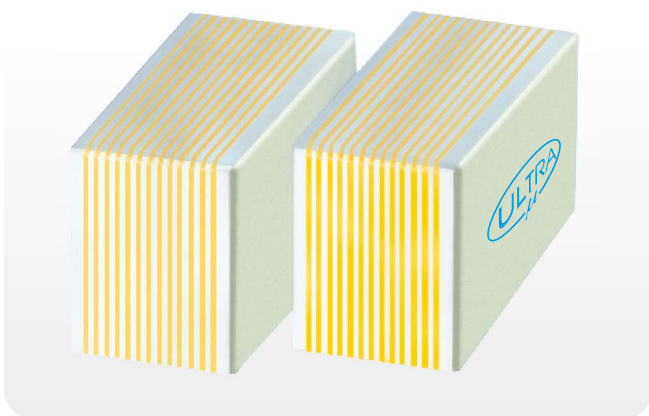

- Used as an accessory for magnetic chuck to clamp thin & odd shaped jobs.
- Simplest method of extending the magnetic flux of magnetic chuck with parallel poles to support the job.
- Maximum flux transformation when placed parallel to pole lines.
- Perfectly ground within 5 Micron & supplied in matched pair.

Sr. No.	Cat No.	Size (mm)
1.	UL 71101	50 W x 35 H x 100 L
2.	UL 71102	60 W x 30 H x 75 L
3.	UL 71103	50 W x 75 H x 75 L
4.	UL 71104	50 W x 50 H x 100 L
5.	UL 71105	80 W x 25 H x 120 L


## 49 SERIES **UL - 712** "ULTRA" BRAND V TYPE TRANSFER BLOCKS

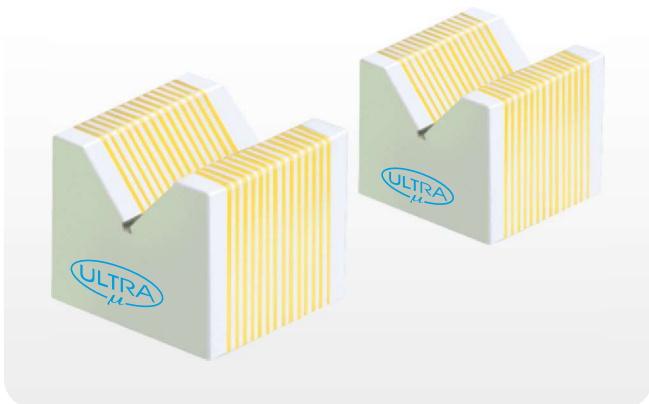

- Used as an accessory for magnetic chuck to clamp thin & odd shape jobs.
- Simplest method of extending the magnetic flux of magnetic chuck with parallel poles to support the job.
- Maximum flux transformation when placed parallel to pole lines.
- 90° V provided for round job.
- Perfectly ground within 5 micron & supplied in matched pair.

Sr. No.	Cat No.	Size (mm)
1.	UL 71201	50 W x 60 H x 45 L
2.	UL 71202	110 W x 60 H x 45 L
3.	UL 71203	75 W x 65 H x 35 L

## 50 SERIES **UL - 720** "ULTRA" BRAND ELECTRO MAGNETIC CHUCK For Cylindrical Grinding

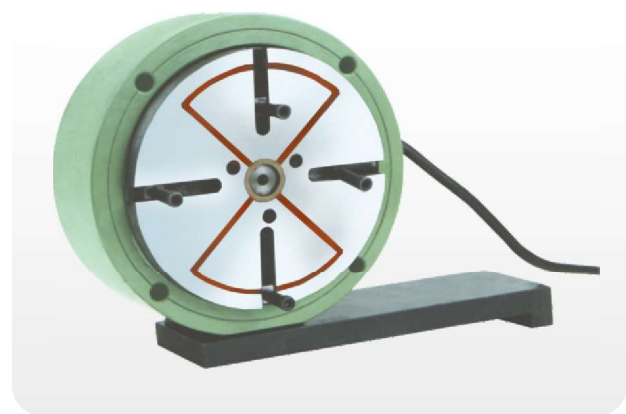

- Work holding device on Cylindrical Grinding m/c to grind outer diameter & face component as bearing recess, flanges, collet bushes, discs etc.
- Can also be used on Lathe machine.
- Mag - D - Mag with variable control unit allows to neutralize the residual magnetism precisely.
- Magnetic Coil (outer body) remains stationary & middle part (Round body) will rotate with spindle through adaptor sleeve.
- Variable supply is useful to true the job.
- 4 T-slots for easy location of job.
- Chuck is tested for Slipping force, Temperature rise, Waterproof, Electrical & Demagnetizing tests.
- Battery Back-up unit is also available on request

Sr. No.	Cat No.	Size (mm)
1.	UL- 72001	Ø 100 [ 4"]
2.	UL- 72002	Ø 150 [ 6"]
3.	UL- 72003	Ø 200 [ 8"]
4.	ULTRA" Mag - D - Mag with variable control unit	